


Luminaire

Code KZ81104
 Name kata metron pst pnd 2x55 Dali 930 FL nro
Measurement.
 Code FTS2400371.
 Name kata metron pst pnd 2x55 Dali 930 FL nro

Luminaire Flux	1846 lm	Luminaire Power	20.0 W	Efficacy	92.300 lm/W	Efficiency	100.00%
Source Flux	1846 lm	Maximum value	5145.51 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area	Length Diam.	55 mm 48 mm	Width Height	55 mm 0 mm	Height	130 mm	
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.001810 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.000438 m2				
Coordinate system Date Measurement Distance	CG 20-06-2024 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux	Rotosymmetrical 180 1846 lm				
LED Flux=2539lm LED Power=18W Eff=73% EfcLed=145lm/W EfcLum=92lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E. F UTE	99 100 100 100 100 --	D DIN 5040 B NBN	A60 BZ 1				


55mm x 55mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
 DLOR 100.00 %
 RN 0.00 %

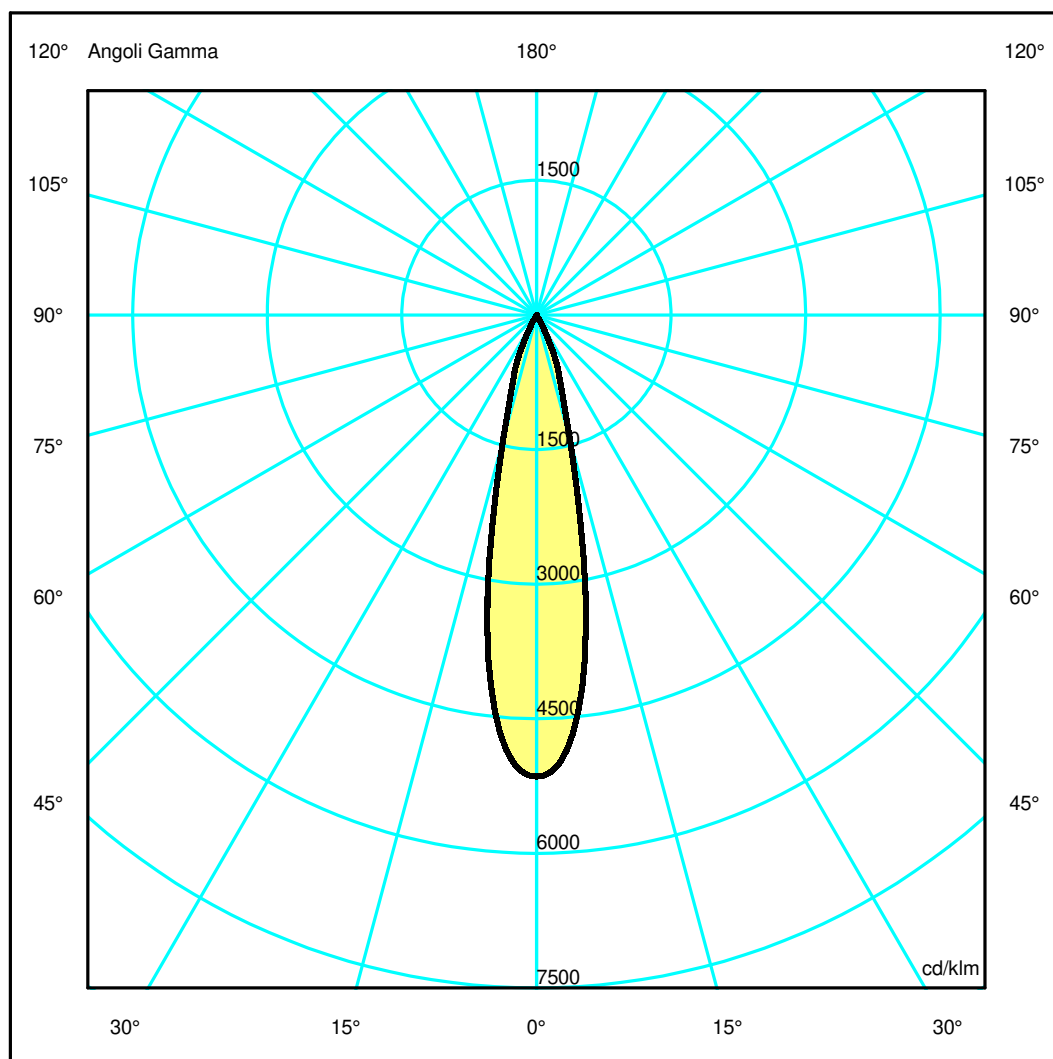

Luminaire


Code KZ81104
 Name kata metron pst pnd 2x55 Dali 930 FL nro
Measur.
 Code FTS2400371.
 Name kata metron pst pnd 2x55 Dali 930 FL nro

Luminaire Flux	1846 lm	Luminaire Power	20.0 W	Efficacy	92.300 lm/W	Efficiency	100.00%
Source Flux	1846 lm	Maximum value	5145.51 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area	Length Diam.	55 mm 48 mm	Width Height	55 mm 0 mm	Height	130 mm	
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.001810 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.000438 m2				
Coordinate system Date Measurement Distance	CG 20-06-2024 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux	Rotosymmetrical 180 1846 lm				
LED Flux=2539lm LED Power=18W Eff=73% EfcLed=145lm/W EfcLum=92lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E. F UTE	99 100 100 100 100 --	D DIN 5040 B NBN	A60 BZ 1				

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.20	0.41	0.61	0.81	1.01	OC	0.20	0.41	0.61	0.81	1.01
OB	0.20	0.41	0.61	0.81	1.01	OD	0.20	0.41	0.61	0.81	1.01

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	9498.60	8633.53	2670.15	674.73	18.65	6.78	3.31	1.99	1.11	0.42
OB	9498.60	8633.53	2670.15	674.73	18.65	6.78	3.31	1.99	1.11	0.42
OC	9498.60	8633.53	2670.15	674.73	18.65	6.78	3.31	1.99	1.11	0.42
OD	9498.60	8633.53	2670.15	674.73	18.65	6.78	3.31	1.99	1.11	0.42

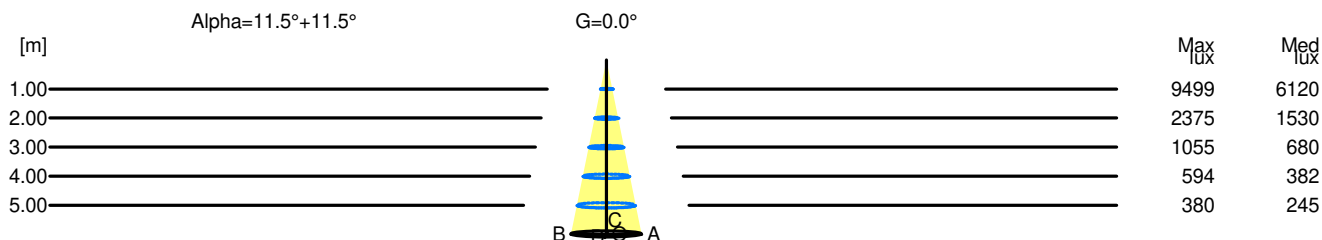

H[m]	D[m]	Max lux	Med lux	Alpha=11.5°+11.5°	G=0.0
1.00	0.41	9499	6120		
2.00	0.81	2375	1530		
3.00	1.22	1055	680		
4.00	1.62	594	382		
5.00	2.03	380	245		