

## Luminaire

Code KZ40204+AP91400  
 Name kata metron pst pen 1x55 Dali 927 WF nr + Anti-Duzzle Louvre

## Measurement

Code FTS2400333.  
 Name kata metron pst pen 1x55 Dali 927 WF nr + Anti-Duzzle Louvre

Luminaire Flux	1313 lm	Luminaire Power	22.0 W	Efficacy	59.682 lm/W	Efficiency	100.00%
Source Flux	1313 lm	Maximum value	4326.59 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area		Length Diam.	55 mm 48 mm	Width Height	55 mm 0 mm	Height	130 mm
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.001810 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.000438 m2	
Coordinate system Date Measurement Distance		CG 20-06-2024 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 1313 lm	
LED Flux=2404lm LED Power=18W Eff=55% EfcLed=137lm/W EfcLum=60lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E. F UTE	100 100 100 100 100 --			D DIN 5040 B NBN	A60 BZ 1		


55mm x 55mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %  
 DLOR 100.00 %  
 RN 0.00 %

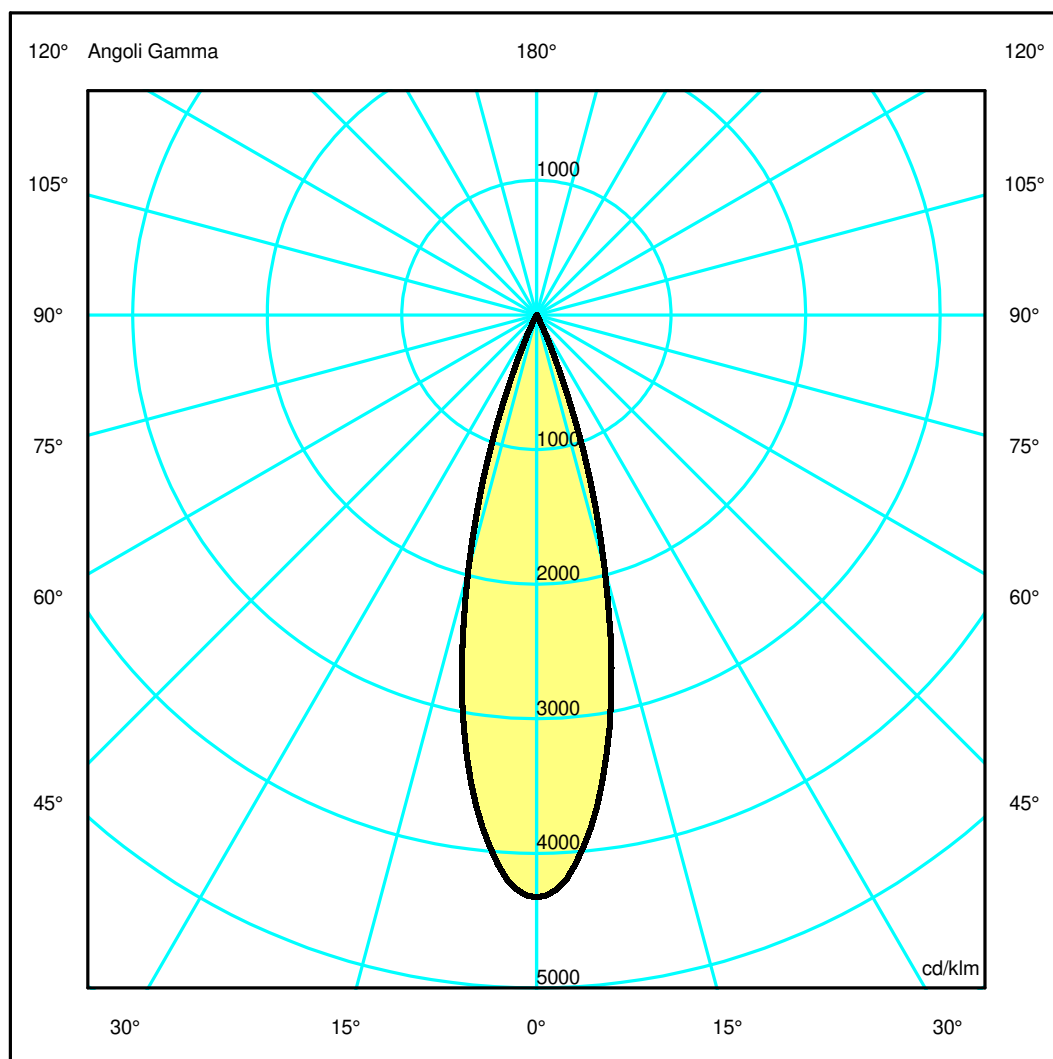

## Luminaire

Code KZ40204+AP91400  
Name kata metron pst pen 1x55 Dali 927 WF nr + Anti-Duzzle Louvre

## Measurem.


Code FTS2400333.  
Name kata metron pst pen 1x55 Dali 927 WF nr + Anti-Duzzle Louvre

Luminaire Flux	1313 lm	Luminaire Power	22.0 W	Efficacy	59.682 lm/W	Efficiency	100.00%
Source Flux	1313 lm	Maximum value	4326.59 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area	Length Diam.	55 mm 48 mm	Width Height	55 mm 0 mm	Height	130 mm	
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.001810 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.000438 m2				
Coordinate system Date Measurement Distance	CG 20-06-2024 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux	Rotosymmetrical 180 1313 lm				
LED Flux=2404lm LED Power=18W Eff=55% EfcLed=137lm/W EfcLum=60lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E. F UTE	100 100 100 100 100 --	D DIN 5040 B NBN	A60 BZ 1				

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.25	0.50	0.76	1.01	1.26	OC	0.25	0.50	0.76	1.01	1.26
OB	0.25	0.50	0.76	1.01	1.26	OD	0.25	0.50	0.76	1.01	1.26

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	5680.81	5212.36	2567.70	204.22	18.65	4.61	1.57	0.50	0.35	0.29
OB	5680.81	5212.36	2567.70	204.22	18.65	4.61	1.57	0.50	0.35	0.29
OC	5680.81	5212.36	2567.70	204.22	18.65	4.61	1.57	0.50	0.35	0.29
OD	5680.81	5212.36	2567.70	204.22	18.65	4.61	1.57	0.50	0.35	0.29

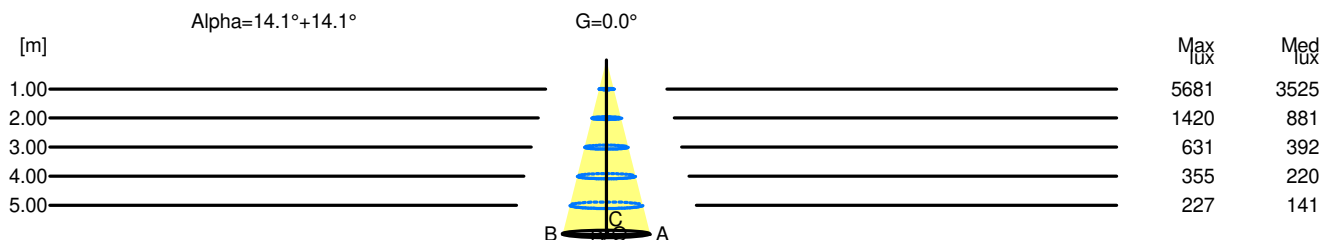

H[m]	D[m]	Max lux	Med lux	Alpha=14.1°+14.1°	G=0.0
1.00	0.50	5681	3525		
2.00	1.01	1420	881		
3.00	1.51	631	392		
4.00	2.01	355	220		
5.00	2.52	227	141		