


Luminaire

Code AT13001+AT09505
 Name A.39 SOSP/PLAF L=1184MM 830 DIM BCO

Measurement

Code FTS1801035-B
 Name A.39 SOSP/PLAF L=1184MM 830 DIM BCO

Luminaire Flux	2374 lm	Luminaire Power	20.0 W	Efficacy	118.700 lm/W	Efficiency	100.00%
Source Flux	2374 lm	Maximum value	384.72 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1184 mm	Width	45 mm	Height	85 mm
Rectangular Luminous Area		Length	1176 mm	Width	40 mm	Height	0 mm
Horizontal Luminous Area	0.047040 m2			Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°		0.011380 m2	
Coordinate system	CG			Symmetry Type		Double Symmetrical	
Date	30-01-2024			Maximum Gamma Angle		180	
Measurement Distance	0.00			Measurement Flux		2374 lm	
LED Flux=3390lm LED Power=18W Eff=70% EfcLed=193lm/W EfcLum=119lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	49 80 96 100 100			D DIN 5040	A30		
F UTE	1.00 E			B NBN	BZ 4		

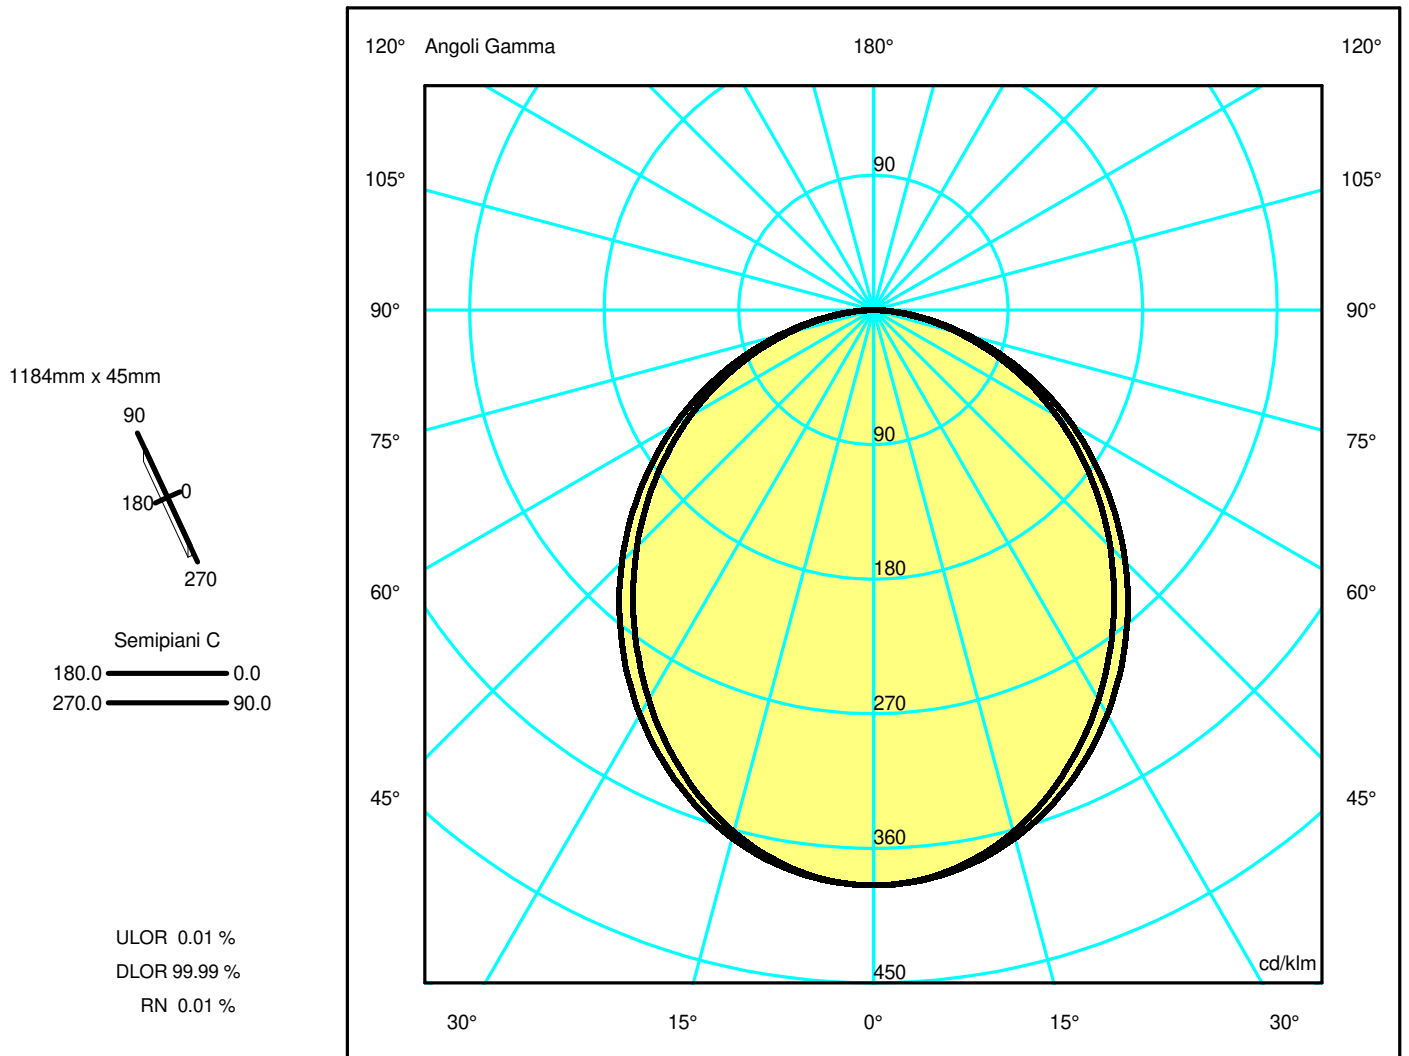

Luminaire

Code AT13001+AT09505
Name A.39 SOSP/PLAF L=1184MM 830 DIM BCO

Measurerm.


Code FTS1801035-B
Name A.39 SOSP/PLAF L=1184MM 830 DIM BCO

Luminaire Flux	2374 lm	Luminaire Power	20.0 W	Efficacy	118.700 lm/W	Efficiency	100.00%
Source Flux	2374 lm	Maximum value	384.72 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1184 mm	Width	45 mm	Height	85 mm
Rectangular Luminous Area		Length	1176 mm	Width	40 mm	Height	0 mm
Horizontal Luminous Area	0.047040 m2			Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°	0.011380 m2		
Coordinate system	CG			Symmetry Type	Double Symmetrical		
Date	30-01-2024			Maximum Gamma Angle	180		
Measurement Distance	0.00			Measurement Flux	2374 lm		
LED Flux=3390lm LED Power=18W Eff=70% EfcLed=193lm/W EfcLum=119lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	49 80 96 100 100			D DIN 5040	A30		
F UTE	1.00 E			B NBN	BZ 4		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.23	2.45	3.68	4.91	6.13	OC	1.34	2.67	4.01	5.35	6.69
OB	1.23	2.45	3.68	4.91	6.13	OD	1.34	2.67	4.01	5.35	6.69

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	913.32	906.82	857.56	768.50	655.80	531.38	401.06	269.82	139.41	33.24
OB	913.32	906.82	857.56	768.50	655.80	531.38	401.06	269.82	139.41	33.24
OC	913.32	908.30	867.76	790.48	687.63	564.93	431.32	294.28	155.62	40.65
OD	913.32	908.30	867.76	790.48	687.63	564.93	431.32	294.28	155.62	40.65

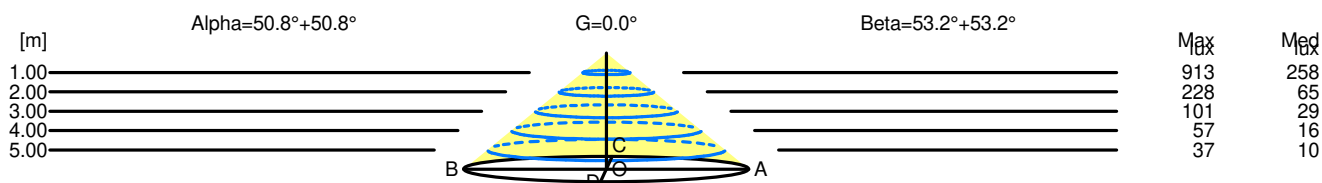

H[m]	D[m]	Max lux	Med lux	Alpha=50.8°+50.8°	G=0.0
1.00	2.45	913	258		
2.00	4.91	228	65		
3.00	7.36	101	29		
4.00	9.81	57	16		
5.00	12.27	37	10		

H[m]	D[m]	Max lux	Med lux	Beta=53.2°+53.2°	G=0.0
1.00	2.67	913	258		
2.00	5.35	228	65		
3.00	8.02	101	29		
4.00	10.70	57	16		
5.00	13.37	37	10		