


Luminaire

Code BM10604
Name HOY SPOT PLAF ORIENT 2700K FL ND NRO

Measur.

Code FTS2000266
Name HOY SPOT PLAF ORIENT 2700K FL ND NRO

Luminaire Flux	1770.58 lm	Luminaire Power	22.00 W	Efficacy	80.48 lm/W	Efficiency	100.00%
Lamps Flux	1770.58 lm	Maximum value	3096.14 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 90 mm Diam. 69 mm	Height	188 mm	Height	0 mm		
Horizontal Luminous Area	0.003739 m2	Emitting area on Plane 180°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 0°	0.000000 m2	Glare area at 76°	0.000905 m2				
Emitting area on Plane 90°	0.000000 m2						
Coordinate system	CG	Symmetry Type	Rotosymmetrical				
Date	22-11-2019	Maximum Gamma Angle	180				
Measurement Distance	0.00	Measurement Flux	1770.58 lm				
LED Flux=2267.4lm LED Power=19W Eff=78% EfcLed=119lm/W EfcLum=80lm/W CCT=2700K Ra=90 SDCM=2 L70(6K)=50000h							
C.I.E.	98 100 100 100 100	D DIN 5040	A60				
F UTE	--	B NBN	BZ 1				

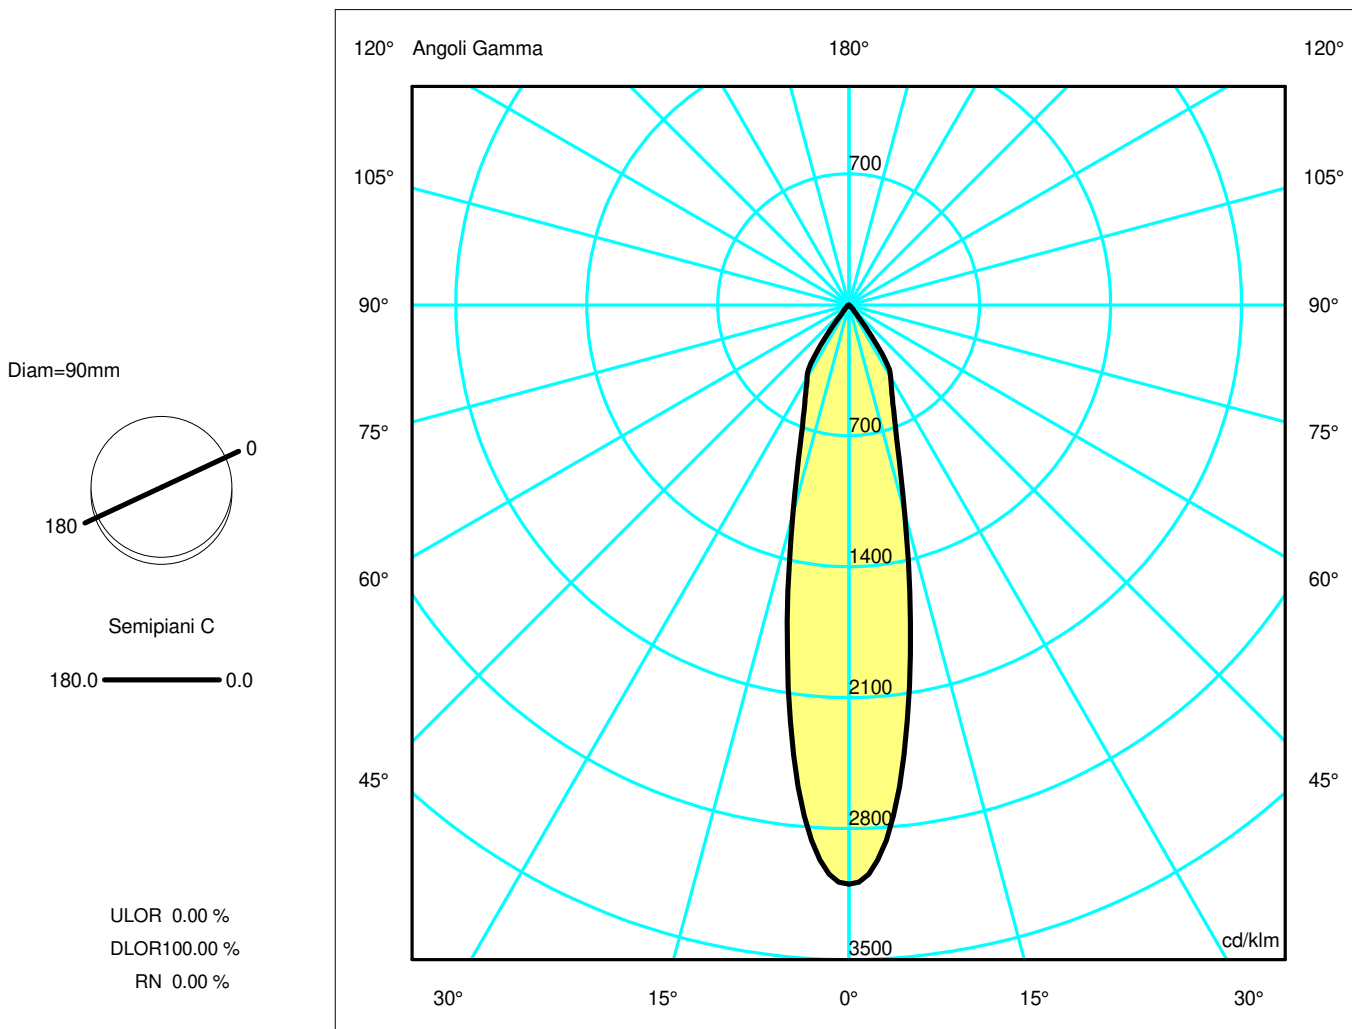

Luminaire

Code BM10604
Name HOY SPOT PLAF ORIENT 2700K FL ND NRO

Measur.


Code FTS2000266
Name HOY SPOT PLAF ORIENT 2700K FL ND NRO

Luminaire Flux	1770.58 lm	Luminaire Power	22.00 W	Efficacy	80.48 lm/W	Efficiency	100.00%
Lamps Flux	1770.58 lm	Maximum value	3096.14 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	90 mm 69 mm	Height Height	188 mm 0 mm		
Horizontal Luminous Area		0.003739 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000905 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		22-11-2019		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1770.58 lm	
LED Flux=2267.4lm LED Power=19W Eff=78% EfcLed=119lm/W EfcLum=80lm/W CCT=2700K Ra=90 SDCM=2 L70(6K)=50000h							
C.I.E.	98	100	100	100		D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.21	0.43	0.64	0.86	1.07	OC	0.21	0.43	0.64	0.86	1.07
OB	0.21	0.43	0.64	0.86	1.07	OD	0.21	0.43	0.64	0.86	1.07

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	5481.97	4850.53	2043.83	975.81	468.67	42.31	10.08	4.92	1.44	0.40
OB	5481.97	4850.53	2043.83	975.81	468.67	42.31	10.08	4.92	1.44	0.40
OC	5481.97	4850.53	2043.83	975.81	468.67	42.31	10.08	4.92	1.44	0.40
OD	5481.97	4850.53	2043.83	975.81	468.67	42.31	10.08	4.92	1.44	0.40

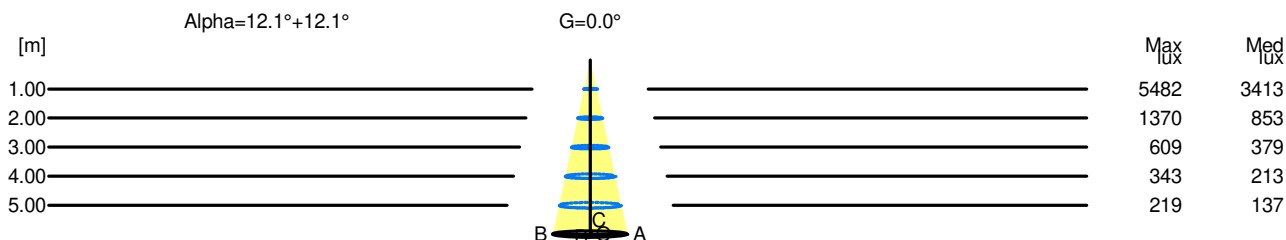

H[m]	D[m]	Max lux	Med lux	Alpha=12.1°+12.1°	G=0.0
1.00	0.43	5482	3413		
2.00	0.86	1370	853		
3.00	1.29	609	379		
4.00	1.72	343	213		
5.00	2.15	219	137		