

Luminaire

Code 1201\$00A
Name Alphabet of light - Ø

Measurem.

Code FTS1700228
Name Alphabet of light - Ø

Luminaire Flux	2517.00 lm	Luminaire Power	36.00 W	Efficacy	69.92 lm/W	Efficiency	100.00%
Sources Flux	2517.00 lm	Maximum value	138.19 cd/klm	Position	C=180.00 G=90.00	CG	Sym. on planes 0-180
Rectangular Luminaire		Length	660 mm	Width	50 mm	Height	960 mm
Rectangular Luminous Area		Length	660 mm	Width	50 mm	Height	959 mm
Horizontal Luminous Area		0.033000 m2		Emitting area on Plane 180°		0.633600 m2	
Emitting area on Plane 0°		0.633600 m2		Emitting area on Plane 270°		0.048000 m2	
Emitting area on Plane 90°		0.048000 m2		Glare area at 76°		0.622763 m2	
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		05-04-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2517.00 lm	


LED Flux=3640,6lm LED Power=36W Eff=69% EfcLed=101lm/W EfcLum=70lm/W Ra=80 SDCM=3 L70(6K)=50000h

C.I.E. 21 46 73 50 100
F UTE 0.50 J + 0.50 T

D DIN 5040
B NBN

C11
BZ 9


660mm x 50mm



Semipiani C

180.0 — 0.0
270.0 — 90.0

ULOR 50.00 %
DLOR 50.00 %
RN 50.00 %

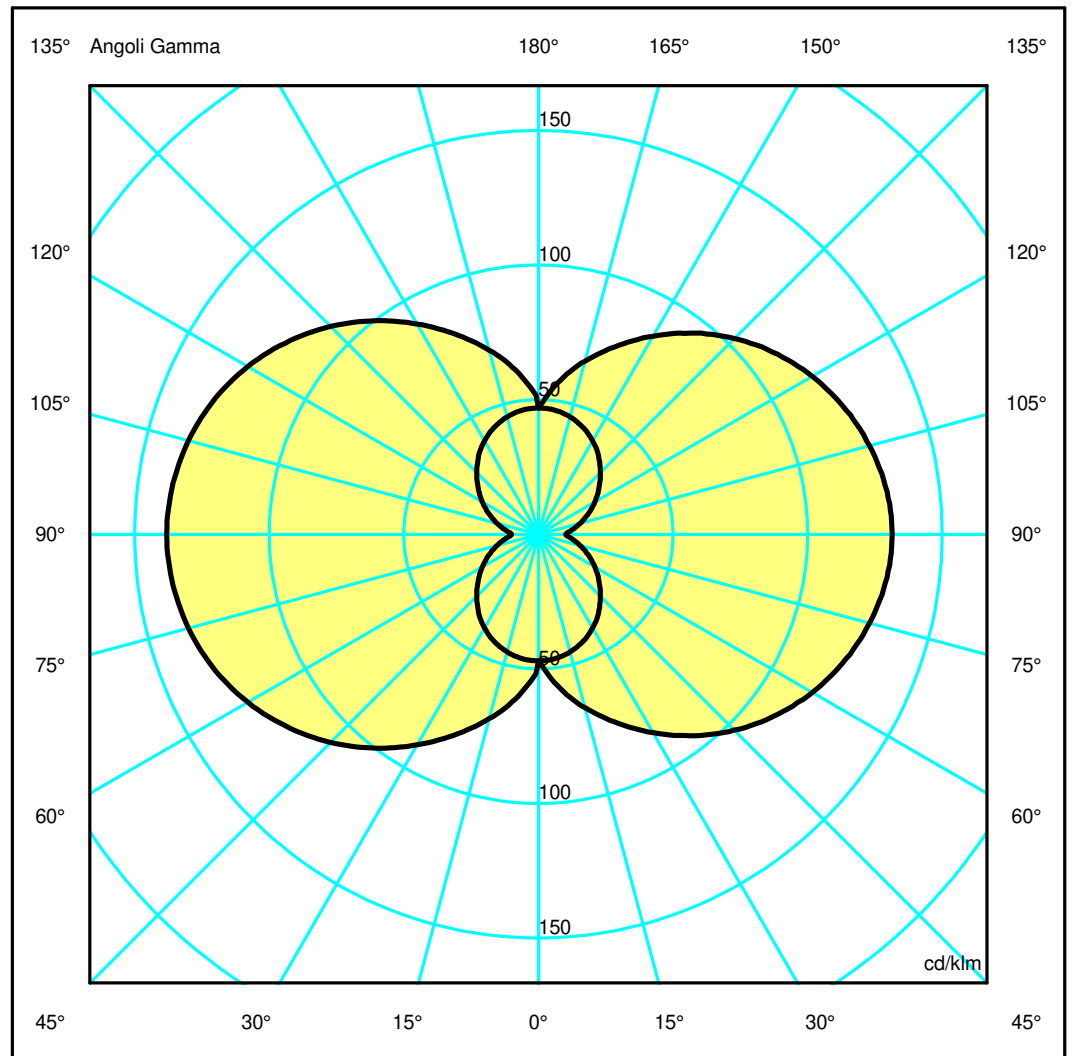

Luminaire

Code 1201\$00A
Name Alphabet of light - Ø

Measurem.

Code FTS1700228
Name Alphabet of light - Ø

Luminaire Flux	2517.00 lm	Luminaire Power	36.00 W	Efficacy	69.92 lm/W	Efficiency	100.00%
Sources Flux	2517.00 lm	Maximum value	138.19 cd/klm	Position	C=180.00 G=90.00	CG	Sym. on planes 0-180
Rectangular Luminaire		Length	660 mm	Width	50 mm	Height	960 mm
Rectangular Luminous Area		Length	660 mm	Width	50 mm	Height	959 mm
Horizontal Luminous Area		0.033000 m2		Emitting area on Plane 180°		0.633600 m2	
Emitting area on Plane 0°		0.633600 m2		Emitting area on Plane 270°		0.048000 m2	
Emitting area on Plane 90°		0.048000 m2		Glare area at 76°		0.622763 m2	
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		05-04-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2517.00 lm	
LED Flux=3640,6lm LED Power=36W Eff=69% EfcLed=101lm/W EfcLum=70lm/W Ra=80 SDCM=3 L70(6K)=50000h							
C.I.E.	21 46 73 50 100			D DIN 5040	C11		
F UTE	0.50 J + 0.50 T			B NBN	BZ 9		

Apertura a sinistra non trovata, gamma =-90

Apertura a sinistra non trovata, gamma =-90

Apertura a sinistra non trovata, gamma =-90